

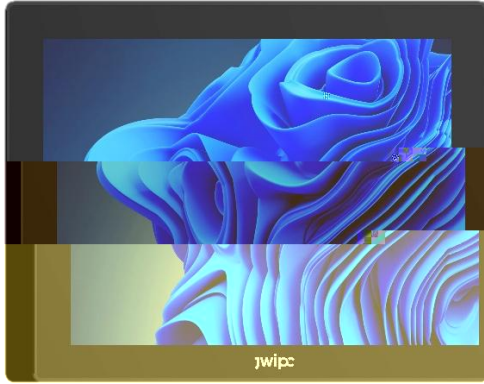




IVS-150

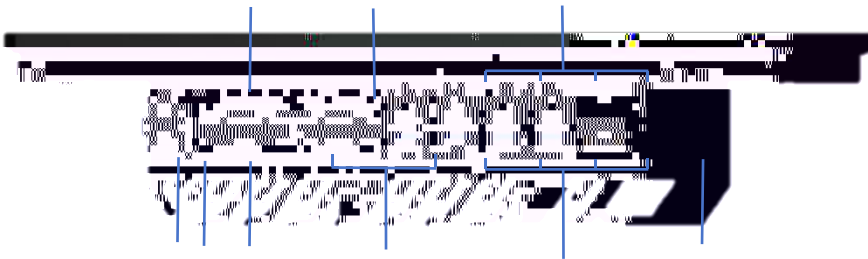

- 15 1024 768
- / 10
- /
- / / 390
- 2
- 2 232/422/485
- 12-36 / /
- /

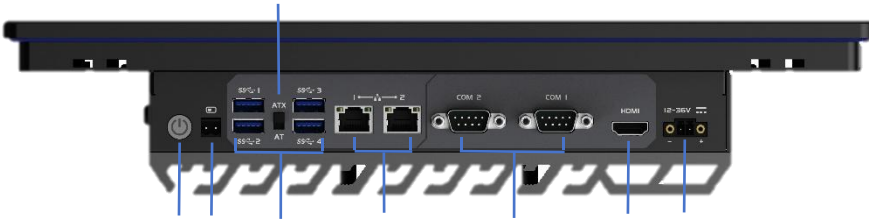


IVS-150

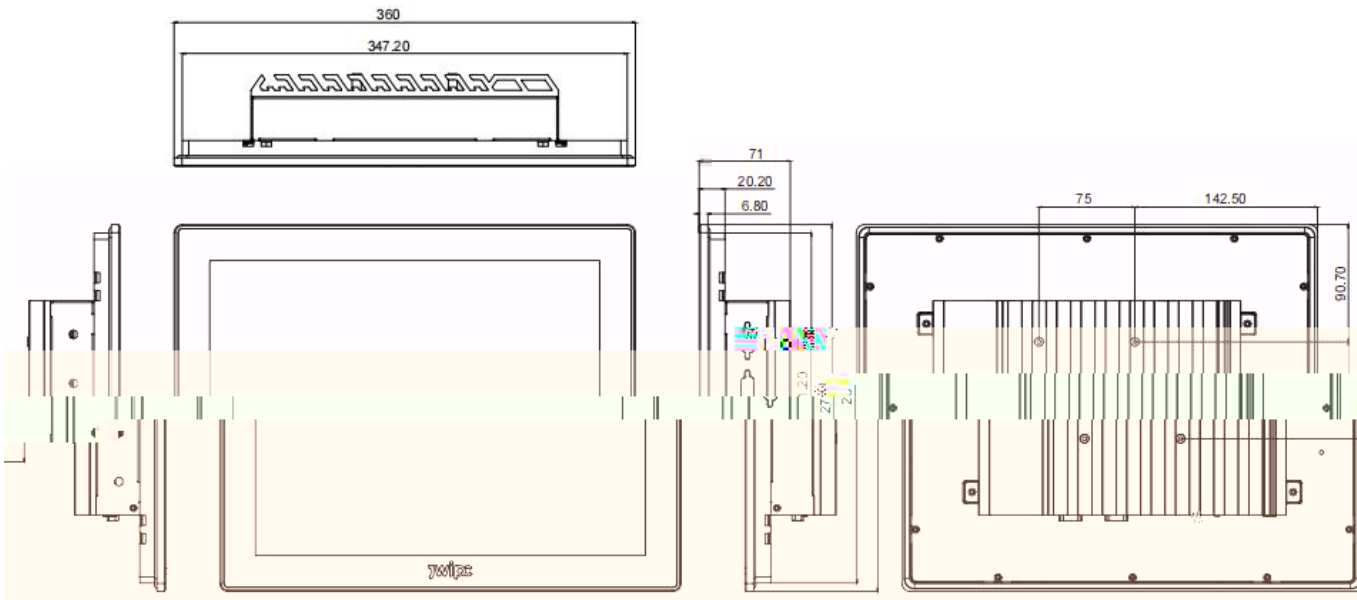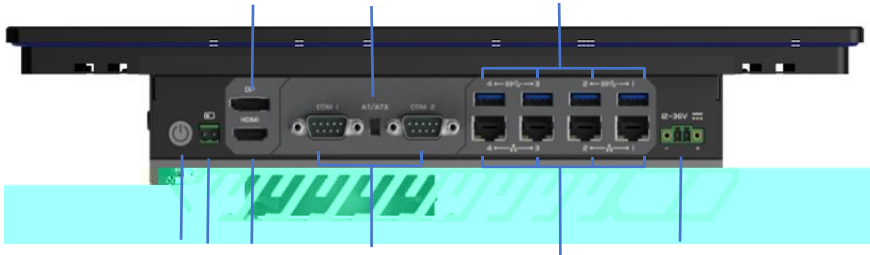


CUT OUT Dimensions: $348^{+1.5}_{-0}$ X $272^{+1.5}_{+0}$ MM

IVS-150

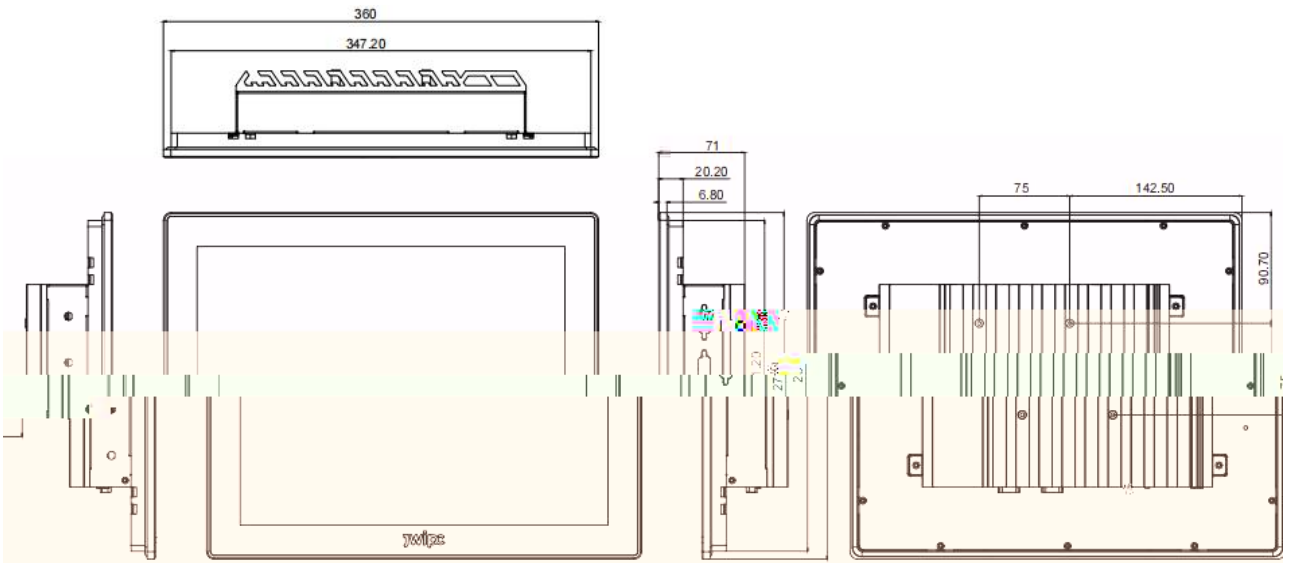

CUT OUT Dimensions: $348^{+1.5}_{-0}$ X $272^{+1.5}_{+0}$ MM



CUT OUT Dimensions: $348^{+1.5}_{-0}$ X $272^{+1.5}_{+0}$ MM

	CPU	2.0	.10	6412 4	3-1215 /15-1235 /17-1255 .15 5-12450 / 7-12650 .25 3-1315 /15-1335 /17-1355 .15 5-13420 / 7-13620 .25	390 6/8/9 7/ 5/ 3 1151 .65			
		1	-	4-3200,	1	-	5-5200	1	-
			16		32			3200,	4-16
		1	.2	2242/2280	1	.2	2242/2280		
		1	7+15	3.0	1	7+15	3.0		
		1	210	,1	3	226-	1	210	4
			226-						
	I/O	2		232/422/485 2	2	232			
		4	3.0						
		1							
		1							
		1	1.4		1	1.4	1	1.2	
		1	.2	2230	6	1	.2	3052/3042	
			4 / 5						
			4:3						
	LCD		1024	768					
			350	/ 2					
			1000:1						
			50000						
			89 ()	, 89 ()	, 89 ()	, 89 ()			
			10	5					
			81%	(80%)					
			5000	1000					
			12-36	,	/ / /				
			360	284	71 (79)			
			7		10,	11,			
	OP				0 50 (32 122)				
					-20 60 (-4 140)				
			95%	40 (-)					
	NOP		-20	60 (-4 140)					
	OP		15	11					
	OP		5	500 1					
	EMC								
	IP		65						

				LAN	USB	COM
-150 3 -			1024			
-8 -	6412		768	8	256	2 4 2
-150 5 -	3		1024			
3-8 -	3-		768	8	256	4 4 2
	1215					
-150 5 -	5		1024			
5-8 -	5-		768	8	256	4 4 2
	1235					
-150 5 -	7		1024			
7-8 -	7-		768	8	256	4 4 2
	1255					
-150 5 -	5		1024			
5-8 -	5-		768	8	256	4 4 2
	12450					
-150 5 -	7		1024			
7-8 -	7-		768	8	256	4 4 2
	12650					
-150 5 -	3		1024			
3-8 -	3-		768	8	256	4 4 2
	1315					
-150 5 -	5		1024			
5-8 -	5-		768	8	256	4 4 2
	1335					
-150 5 -	7		1024			
7-8 -	7-		768	8	256	4 4 2
	1355					
-150 5 -	5		1024			
5-8 -	5-		768	8	256	4 4 2
	13420					
300600023925	, 06519034-6 ,65 ,100-240 ,19 ,3.42 , , ,0 +40 , ,					
300600016156	, -90 19,90 , 100 240 ,19 ,4.74 , , / / ,0 40 , ,					
300600023479	, 15019079-6 ,150 ,100 240 ,18.05 19.95 ,7.9 ,2 , ,0 40 , ,					
301800000605	, , - =1.5 , - 31 -2 5, 300/500 ,3 0.75 2, , , ,					
301700021856	I/O	,JL396-39602G01, ,2Pin,3.96mm,Copper Alloy,90				

DDR4	-	16				
DDR5	-	32				
SSD	.2	128	,256	,512	,1	,2
HDD	2.5	128	,256	,512	,1	,2
4G/5GModule	4	/5				
WiFi & Bluetooth Module		&				
COM	2	232				
POE	-4	, 0.1				
		,75	100			
I/O		,2Pin,3.81mm				
		, 180	, ,		, 304, =3.0,24	21.7 23